

CALIFORNIA PUMP


PROVEN LONG-TERM DURABILITY



PRODUCT FEATURES

Product Features:

- 2 inch suction and discharge ports
- Ring-lock lid eliminates leaks and maximizes suction efficiency
- Asynchronous, two-pole motor
- Class insulation: 130(B)
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- Available in 50Hz or 60Hz for 220V/380V
- Specially designed unions compatible for both Imperial and Metric standards
- Testing Pressure (50PSI / 3.5Bar)
- 316 stainless steel shaft
- 316 stainless steel mechanical seal

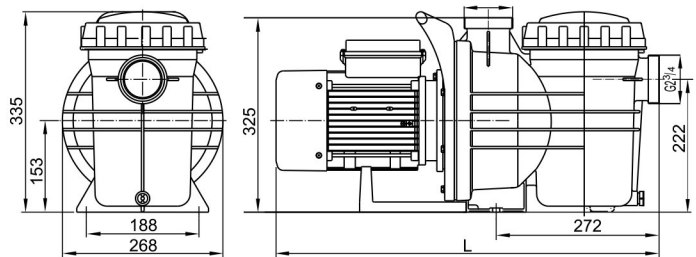

Aqua Pool Goup

Self priming pump for above or inground swimming pools. Reinforced fiberglass body for maximum durability. Equipped with an advanced hydraulic design that enables high performance and reduces the noise to the minimum. Powerful motor with inbuilt thermal protector. Double protection to isolate water from electricity

Aqua Pool Group California Series pump delivers high flow and energy efficiency ultra performance. 2-inch suction and discharge port with a transparent lid. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.

Model	Qmax (l/min)	Hmax (m)	Power(P ₁)		L		Noise (dBA)
			KW	HP	Single-phase	Three-phase	
CAL - 120	350	12.5	0.9	1.2	603	603	62
CAL - 150	380	16.5	1.1	1.5	603	603	64
CAL - 200	500	20	1.5	2.0	603	603	65
CAL - 250	560	19.5	1.85	2.5	603	603	67
CAL - 300	600	22	2.2	3.0	616	603	71
CAL - 400	650	25	3.0	4.0	640	640	75
CAL - 120T	350	12.5	0.9	1.2	603	603	62
CAL - 150T	380	16.5	1.1	1.5	603	603	64
CAL - 200T	500	20	1.5	2.0	603	603	65
CAL - 250T	560	19.5	1.85	2.5	603	603	67
CAL - 300T	600	22	2.2	3.0	616	603	71
CAL - 400T	650	25	3.0	4.0	640	640	75